


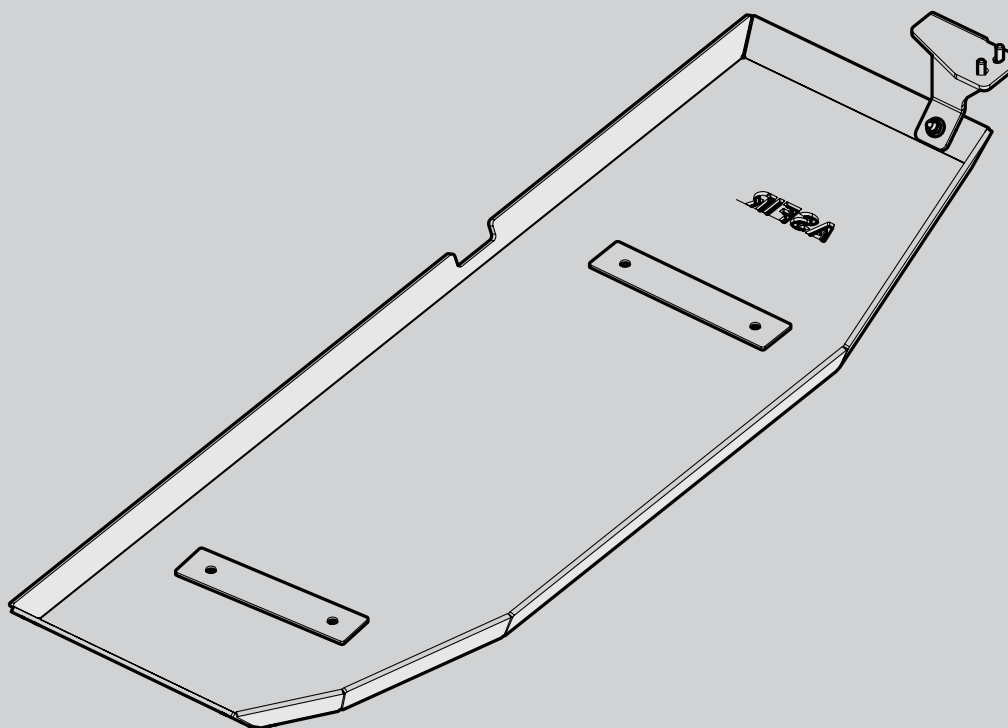



Fuel tank skid plate Mounting instructions for Toyota Hilux

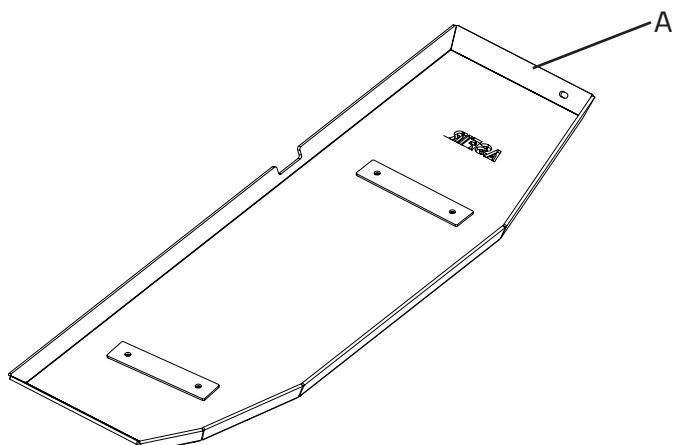





Pocket washer 8




Hex bolt M8x25




Hex bolt M8x30



Hex nut nylock M8



Spring washer 8




Washer 8x20


Maximum Tightening Torques

M8 (8.8)



25 Nm





12,13

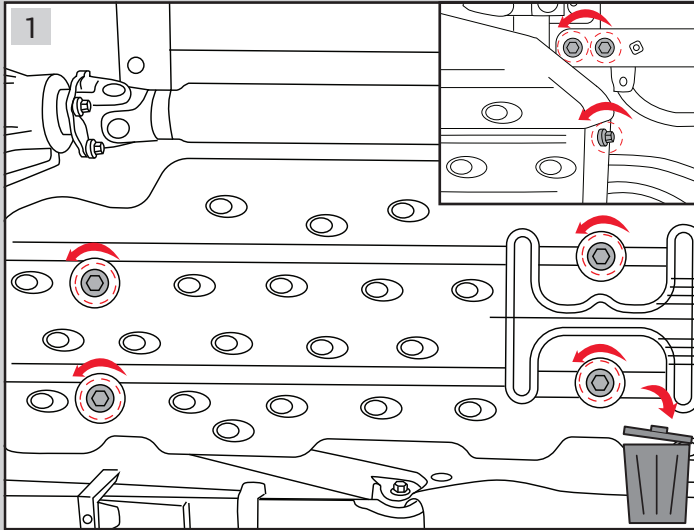


1
Open 7 bolts of the fuel tank plate and urea tank (See small drawing) and remove the plate. Save the bolts for later use. Dispose the plate

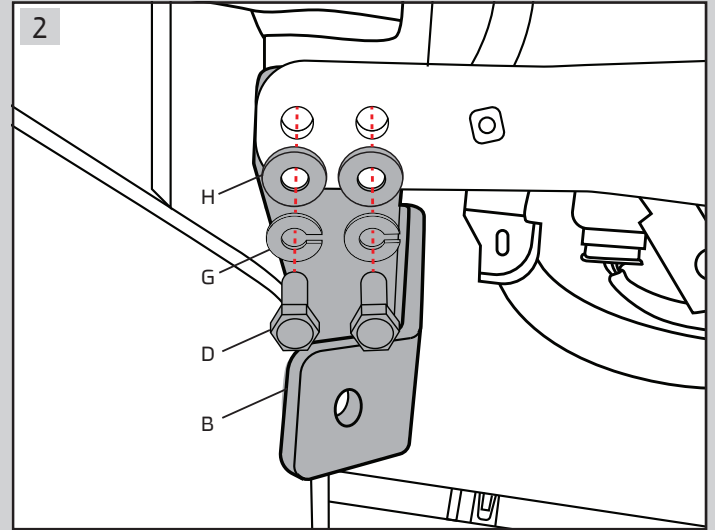

2
Place bracket (B) and tighten 2 hex bolts (D), spring washer (G) and washer (H) through bracket (B) and chassis

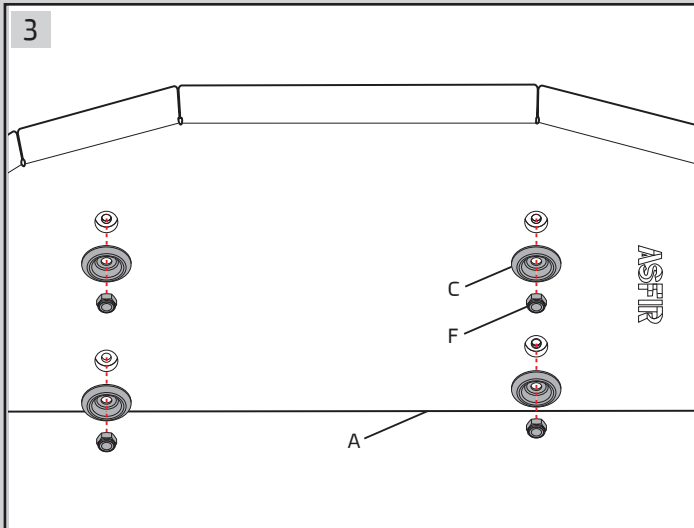

3
Connect plate (A) using 4 original bolts with hex nut (F), pocket washer (C) to original screwing

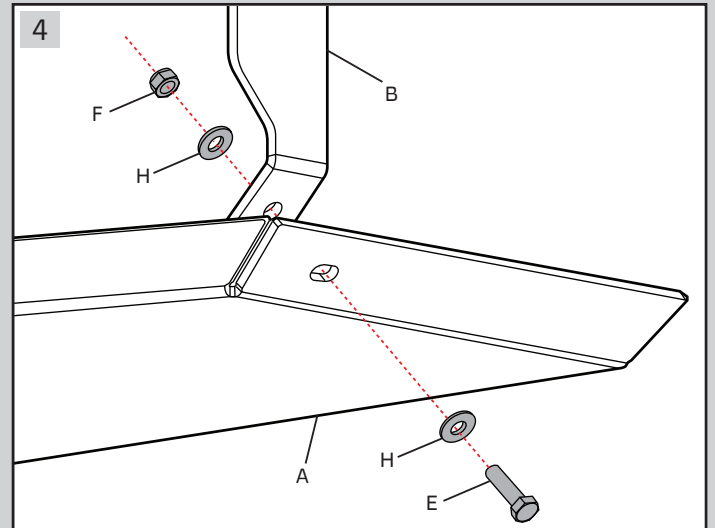

4
Connect plate (A) to bracket (B) using bolt (E), washer (H) and hex nut (F)

